

## 6.2 Master Theorem

### Lemma 1

Let  $a \geq 1$ ,  $b \geq 1$  and  $\epsilon > 0$  denote constants. Consider the recurrence

$$T(n) = aT\left(\frac{n}{b}\right) + f(n) .$$

#### Case 1.

If  $f(n) = \mathcal{O}(n^{\log_b(a)-\epsilon})$  then  $T(n) = \Theta(n^{\log_b a})$ .

#### Case 2.

If  $f(n) = \Theta(n^{\log_b(a)} \log^k n)$  then  $T(n) = \Theta(n^{\log_b a} \log^{k+1} n)$ ,  
 $k \geq 0$ .

#### Case 3.

If  $f(n) = \Omega(n^{\log_b(a)+\epsilon})$  and for sufficiently large  $n$   
 $af\left(\frac{n}{b}\right) \leq cf(n)$  for some constant  $c < 1$  then  $T(n) = \Theta(f(n))$ .

## 6.2 Master Theorem

We prove the Master Theorem for the case that  $n$  is of the form  $b^{\ell}$ , and we assume that the non-recursive case occurs for problem size 1 and incurs cost 1.

# The Recursion Tree

The running time of a recursive algorithm can be visualized by a recursion tree:


# The Recursion Tree

The running time of a recursive algorithm can be visualized by a recursion tree:




# The Recursion Tree

The running time of a recursive algorithm can be visualized by a recursion tree:

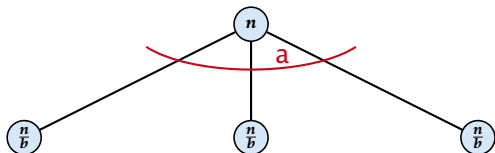


# The Recursion Tree

The running time of a recursive algorithm can be visualized by a recursion tree:

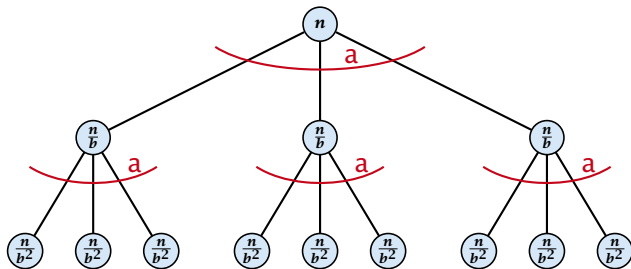


# The Recursion Tree

The running time of a recursive algorithm can be visualized by a recursion tree:

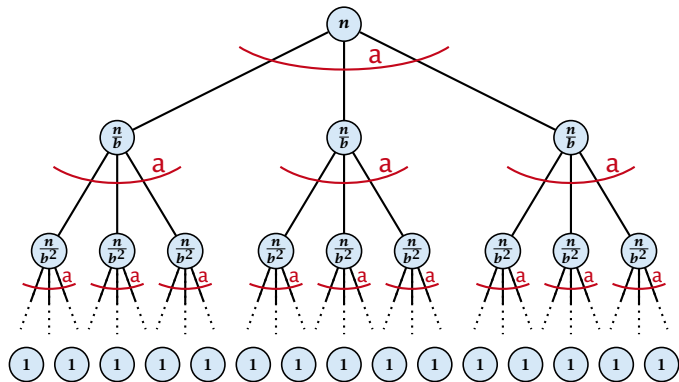

# The Recursion Tree


The running time of a recursive algorithm can be visualized by a recursion tree:

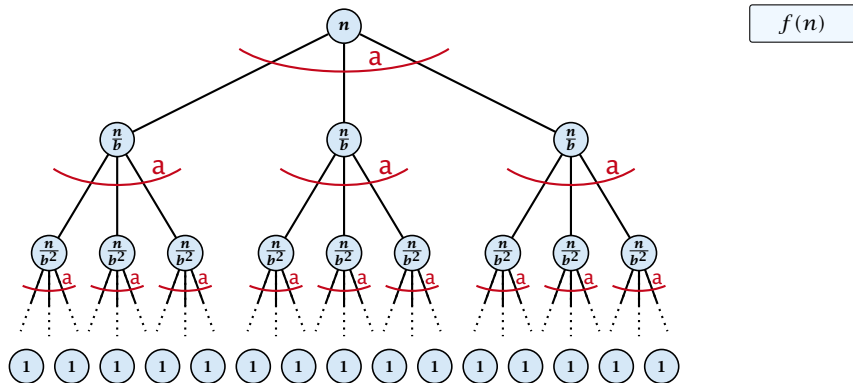




# The Recursion Tree

The running time of a recursive algorithm can be visualized by a recursion tree:

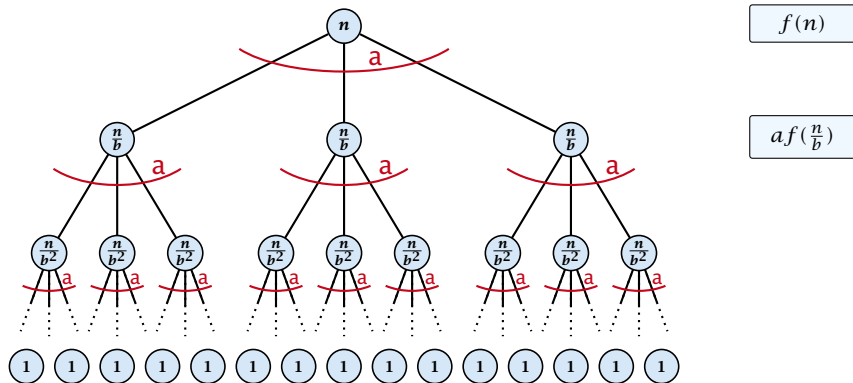


# The Recursion Tree

The running time of a recursive algorithm can be visualized by a recursion tree:

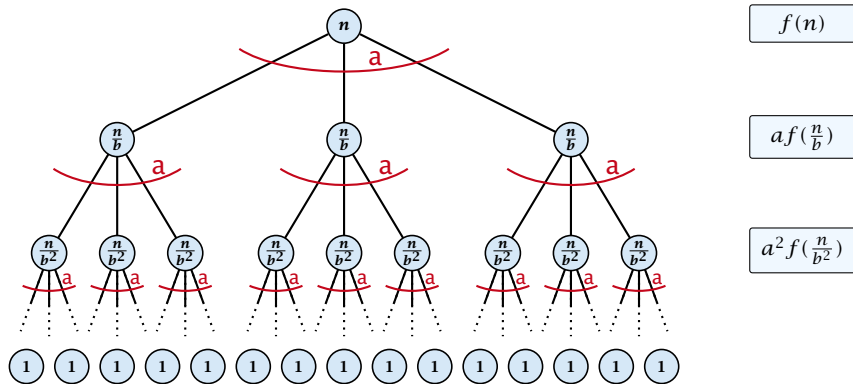

# The Recursion Tree

The running time of a recursive algorithm can be visualized by a recursion tree:

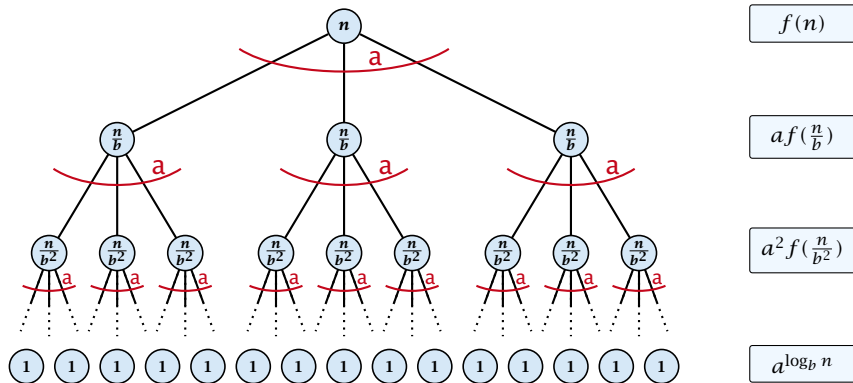



## 6.2 Master Theorem

This gives

$$T(n) = n^{\log_b a} + \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) .$$

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$T(n) = n^{\log_b a}$$

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$T(n) - n^{\log_b a} = \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right)$$



Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a - \epsilon} \end{aligned}$$

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a - \epsilon} \end{aligned}$$

$$b^{-i(\log_b a - \epsilon)} = b^{\epsilon i} (b^{\log_b a})^{-i} = b^{\epsilon i} a^{-i}$$

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a - \epsilon} \end{aligned}$$

$$\boxed{b^{-i(\log_b a - \epsilon)} = b^{\epsilon i} (b^{\log_b a})^{-i} = b^{\epsilon i} a^{-i}} = cn^{\log_b a - \epsilon} \sum_{i=0}^{\log_b n - 1} (b^{\epsilon})^i$$

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a - \epsilon} \end{aligned}$$

$$\boxed{b^{-i(\log_b a - \epsilon)} = b^{\epsilon i} (b^{\log_b a})^{-i} = b^{\epsilon i} a^{-i}} = cn^{\log_b a - \epsilon} \sum_{i=0}^{\log_b n - 1} (b^{\epsilon})^i$$

$$\boxed{\sum_{i=0}^k q^i = \frac{q^{k+1} - 1}{q - 1}}$$

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a - \epsilon} \end{aligned}$$

$$\boxed{b^{-i(\log_b a - \epsilon)} = b^{\epsilon i} (b^{\log_b a})^{-i} = b^{\epsilon i} a^{-i}} = cn^{\log_b a - \epsilon} \sum_{i=0}^{\log_b n - 1} (b^{\epsilon})^i$$

$$\boxed{\sum_{i=0}^k q^i = \frac{q^{k+1} - 1}{q - 1}} = cn^{\log_b a - \epsilon} (b^{\epsilon \log_b n} - 1) / (b^{\epsilon} - 1)$$

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a - \epsilon} \end{aligned}$$

$$\begin{aligned} \boxed{b^{-i(\log_b a - \epsilon)} = b^{\epsilon i} (b^{\log_b a})^{-i} = b^{\epsilon i} a^{-i}} &= cn^{\log_b a - \epsilon} \sum_{i=0}^{\log_b n - 1} (b^{\epsilon})^i \\ \boxed{\sum_{i=0}^k q^i = \frac{q^{k+1} - 1}{q - 1}} &= cn^{\log_b a - \epsilon} (b^{\epsilon \log_b n} - 1) / (b^{\epsilon} - 1) \\ &= cn^{\log_b a - \epsilon} (n^{\epsilon} - 1) / (b^{\epsilon} - 1) \end{aligned}$$

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a - \epsilon} \end{aligned}$$

$$\begin{aligned} \boxed{b^{-i(\log_b a - \epsilon)} = b^{\epsilon i} (b^{\log_b a})^{-i} = b^{\epsilon i} a^{-i}} &= cn^{\log_b a - \epsilon} \sum_{i=0}^{\log_b n - 1} (b^{\epsilon})^i \\ \boxed{\sum_{i=0}^k q^i = \frac{q^{k+1} - 1}{q - 1}} &= cn^{\log_b a - \epsilon} (b^{\epsilon \log_b n} - 1) / (b^{\epsilon} - 1) \\ &= cn^{\log_b a - \epsilon} (n^{\epsilon} - 1) / (b^{\epsilon} - 1) \\ &= \frac{c}{b^{\epsilon} - 1} n^{\log_b a} (n^{\epsilon} - 1) / (n^{\epsilon}) \end{aligned}$$

Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a - \epsilon} \end{aligned}$$

$$\begin{aligned} \boxed{b^{-i(\log_b a - \epsilon)} = b^{\epsilon i} (b^{\log_b a})^{-i} = b^{\epsilon i} a^{-i}} &= cn^{\log_b a - \epsilon} \sum_{i=0}^{\log_b n - 1} (b^{\epsilon})^i \\ \boxed{\sum_{i=0}^k q^i = \frac{q^{k+1} - 1}{q - 1}} &= cn^{\log_b a - \epsilon} (b^{\epsilon \log_b n} - 1) / (b^{\epsilon} - 1) \\ &= cn^{\log_b a - \epsilon} (n^{\epsilon} - 1) / (b^{\epsilon} - 1) \\ &= \frac{c}{b^{\epsilon} - 1} n^{\log_b a} (n^{\epsilon} - 1) / (n^{\epsilon}) \end{aligned}$$

Hence,

$$T(n) \leq \left( \frac{c}{b^{\epsilon} - 1} + 1 \right) n^{\log_b(a)}$$



Case 1. Now suppose that  $f(n) \leq cn^{\log_b a - \epsilon}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a - \epsilon} \end{aligned}$$

$$\begin{aligned} \boxed{b^{-i(\log_b a - \epsilon)} = b^{\epsilon i} (b^{\log_b a})^{-i} = b^{\epsilon i} a^{-i}} &= cn^{\log_b a - \epsilon} \sum_{i=0}^{\log_b n - 1} (b^{\epsilon})^i \\ \boxed{\sum_{i=0}^k q^i = \frac{q^{k+1} - 1}{q - 1}} &= cn^{\log_b a - \epsilon} (b^{\epsilon \log_b n} - 1) / (b^{\epsilon} - 1) \\ &= cn^{\log_b a - \epsilon} (n^{\epsilon} - 1) / (b^{\epsilon} - 1) \\ &= \frac{c}{b^{\epsilon} - 1} n^{\log_b a} (n^{\epsilon} - 1) / (n^{\epsilon}) \end{aligned}$$

Hence,

$$T(n) \leq \left( \frac{c}{b^{\epsilon} - 1} + 1 \right) n^{\log_b(a)} \quad \Rightarrow T(n) = \mathcal{O}(n^{\log_b a}).$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a}$ .

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a}$ .

$$T(n) = n^{\log_b a}$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a}$ .

$$T(n) - n^{\log_b a} = \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right)$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \end{aligned}$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \\ &= cn^{\log_b a} \sum_{i=0}^{\log_b n - 1} 1 \end{aligned}$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a}$ .

$$\begin{aligned}T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\&\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \\&= cn^{\log_b a} \sum_{i=0}^{\log_b n - 1} 1 \\&= cn^{\log_b a} \log_b n\end{aligned}$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \\ &= cn^{\log_b a} \sum_{i=0}^{\log_b n - 1} 1 \\ &= cn^{\log_b a} \log_b n \end{aligned}$$

Hence,

$$T(n) = \mathcal{O}(n^{\log_b a} \log_b n)$$



Case 2. Now suppose that  $f(n) \leq cn^{\log_b a}$ .

$$\begin{aligned}T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\&\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \\&= cn^{\log_b a} \sum_{i=0}^{\log_b n - 1} 1 \\&= cn^{\log_b a} \log_b n\end{aligned}$$

Hence,

$$T(n) = \mathcal{O}(n^{\log_b a} \log_b n)$$

$$\Rightarrow T(n) = \mathcal{O}(n^{\log_b a} \log n).$$

Case 2. Now suppose that  $f(n) \geq cn^{\log_b a}$ .

Case 2. Now suppose that  $f(n) \geq cn^{\log_b a}$ .

$$T(n) = n^{\log_b a}$$

Case 2. Now suppose that  $f(n) \geq cn^{\log_b a}$ .

$$T(n) - n^{\log_b a} = \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right)$$

Case 2. Now suppose that  $f(n) \geq cn^{\log_b a}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\geq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \end{aligned}$$

Case 2. Now suppose that  $f(n) \geq cn^{\log_b a}$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\geq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \\ &= cn^{\log_b a} \sum_{i=0}^{\log_b n - 1} 1 \end{aligned}$$

Case 2. Now suppose that  $f(n) \geq cn^{\log_b a}$ .

$$\begin{aligned}T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\geq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \\ &= cn^{\log_b a} \sum_{i=0}^{\log_b n - 1} 1 \\ &= cn^{\log_b a} \log_b n\end{aligned}$$

Case 2. Now suppose that  $f(n) \geq cn^{\log_b a}$ .

$$\begin{aligned}T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\geq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \\ &= cn^{\log_b a} \sum_{i=0}^{\log_b n - 1} 1 \\ &= cn^{\log_b a} \log_b n\end{aligned}$$

Hence,

$$T(n) = \Omega(n^{\log_b a} \log_b n)$$



Case 2. Now suppose that  $f(n) \geq cn^{\log_b a}$ .

$$\begin{aligned}T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\geq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \\ &= cn^{\log_b a} \sum_{i=0}^{\log_b n - 1} 1 \\ &= cn^{\log_b a} \log_b n\end{aligned}$$

Hence,

$$T(n) = \Omega(n^{\log_b a} \log_b n)$$

$$\Rightarrow T(n) = \Omega(n^{\log_b a} \log n).$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$T(n) = n^{\log_b a}$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$T(n) - n^{\log_b a} = \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right)$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \cdot \left(\log_b\left(\frac{n}{b^i}\right)\right)^k \end{aligned}$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \cdot \left(\log_b\left(\frac{n}{b^i}\right)\right)^k \end{aligned}$$

$$n = b^\ell \Rightarrow \ell = \log_b n$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \cdot \left(\log_b\left(\frac{n}{b^i}\right)\right)^k \end{aligned}$$

$$\boxed{n = b^\ell \Rightarrow \ell = \log_b n} = cn^{\log_b a} \sum_{i=0}^{\ell-1} \left(\log_b\left(\frac{b^\ell}{b^i}\right)\right)^k$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \cdot \left(\log_b\left(\frac{n}{b^i}\right)\right)^k \end{aligned}$$

$$n = b^\ell \Rightarrow \ell = \log_b n$$

$$\begin{aligned} &= cn^{\log_b a} \sum_{i=0}^{\ell-1} \left(\log_b\left(\frac{b^\ell}{b^i}\right)\right)^k \\ &= cn^{\log_b a} \sum_{i=0}^{\ell-1} (\ell - i)^k \end{aligned}$$



Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \cdot \left(\log_b\left(\frac{n}{b^i}\right)\right)^k \end{aligned}$$

$$n = b^\ell \Rightarrow \ell = \log_b n$$

$$\begin{aligned} &= cn^{\log_b a} \sum_{i=0}^{\ell-1} \left(\log_b\left(\frac{b^\ell}{b^i}\right)\right)^k \\ &= cn^{\log_b a} \sum_{i=0}^{\ell-1} (\ell - i)^k \\ &= cn^{\log_b a} \sum_{i=1}^{\ell} i^k \end{aligned}$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \cdot \left(\log_b\left(\frac{n}{b^i}\right)\right)^k \end{aligned}$$

$$n = b^\ell \Rightarrow \ell = \log_b n$$

$$= cn^{\log_b a} \sum_{i=0}^{\ell-1} \left(\log_b\left(\frac{b^\ell}{b^i}\right)\right)^k$$

$$= cn^{\log_b a} \sum_{i=0}^{\ell-1} (\ell - i)^k$$

$$= cn^{\log_b a} \sum_{i=1}^{\ell} i^k \approx \frac{1}{k} \ell^{k+1}$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \cdot \left(\log_b\left(\frac{n}{b^i}\right)\right)^k \end{aligned}$$

$$n = b^\ell \Rightarrow \ell = \log_b n$$

$$\begin{aligned} &= cn^{\log_b a} \sum_{i=0}^{\ell-1} \left(\log_b\left(\frac{b^\ell}{b^i}\right)\right)^k \\ &= cn^{\log_b a} \sum_{i=0}^{\ell-1} (\ell - i)^k \\ &= cn^{\log_b a} \sum_{i=1}^{\ell} i^k \\ &\approx \frac{c}{k} n^{\log_b a} \ell^{k+1} \end{aligned}$$

Case 2. Now suppose that  $f(n) \leq cn^{\log_b a} (\log_b(n))^k$ .

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq c \sum_{i=0}^{\log_b n - 1} a^i \left(\frac{n}{b^i}\right)^{\log_b a} \cdot \left(\log_b\left(\frac{n}{b^i}\right)\right)^k \end{aligned}$$

$$n = b^\ell \Rightarrow \ell = \log_b n$$

$$= cn^{\log_b a} \sum_{i=0}^{\ell-1} \left(\log_b\left(\frac{b^\ell}{b^i}\right)\right)^k$$

$$= cn^{\log_b a} \sum_{i=0}^{\ell-1} (\ell - i)^k$$

$$= cn^{\log_b a} \sum_{i=1}^{\ell} i^k$$

$$\approx \frac{c}{k} n^{\log_b a} \ell^{k+1}$$

$$\Rightarrow T(n) = \mathcal{O}(n^{\log_b a} \log^{k+1} n).$$

Case 3. Now suppose that  $f(n) \geq dn^{\log_b a + \epsilon}$ , and that for sufficiently large  $n$ :  $af(n/b) \leq cf(n)$ , for  $c < 1$ .

**Case 3.** Now suppose that  $f(n) \geq dn^{\log_b a + \epsilon}$ , and that for sufficiently large  $n$ :  $af(n/b) \leq cf(n)$ , for  $c < 1$ .

From this we get  $a^i f(n/b^i) \leq c^i f(n)$ , where we assume that  $n/b^{i-1} \geq n_0$  is still sufficiently large.

**Case 3.** Now suppose that  $f(n) \geq dn^{\log_b a + \epsilon}$ , and that for sufficiently large  $n$ :  $af(n/b) \leq cf(n)$ , for  $c < 1$ .

From this we get  $a^i f(n/b^i) \leq c^i f(n)$ , where we assume that  $n/b^{i-1} \geq n_0$  is still sufficiently large.

$$T(n) - n^{\log_b a} = \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right)$$

**Case 3.** Now suppose that  $f(n) \geq dn^{\log_b a + \epsilon}$ , and that for sufficiently large  $n$ :  $af(n/b) \leq cf(n)$ , for  $c < 1$ .

From this we get  $a^i f(n/b^i) \leq c^i f(n)$ , where we assume that  $n/b^{i-1} \geq n_0$  is still sufficiently large.

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq \sum_{i=0}^{\log_b n - 1} c^i f(n) + \mathcal{O}(n^{\log_b a}) \end{aligned}$$



**Case 3.** Now suppose that  $f(n) \geq dn^{\log_b a + \epsilon}$ , and that for sufficiently large  $n$ :  $af(n/b) \leq cf(n)$ , for  $c < 1$ .

From this we get  $a^i f(n/b^i) \leq c^i f(n)$ , where we assume that  $n/b^{i-1} \geq n_0$  is still sufficiently large.

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq \sum_{i=0}^{\log_b n - 1} c^i f(n) + \mathcal{O}(n^{\log_b a}) \end{aligned}$$

$$q < 1 : \sum_{i=0}^n q^i = \frac{1 - q^{n+1}}{1 - q} \leq \frac{1}{1 - q}$$

**Case 3.** Now suppose that  $f(n) \geq dn^{\log_b a + \epsilon}$ , and that for sufficiently large  $n$ :  $af(n/b) \leq cf(n)$ , for  $c < 1$ .

From this we get  $a^i f(n/b^i) \leq c^i f(n)$ , where we assume that  $n/b^{i-1} \geq n_0$  is still sufficiently large.

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq \sum_{i=0}^{\log_b n - 1} c^i f(n) + \mathcal{O}(n^{\log_b a}) \\ &\leq \frac{1}{1-c} f(n) + \mathcal{O}(n^{\log_b a}) \end{aligned}$$

$$q < 1 : \sum_{i=0}^n q^i = \frac{1-q^{n+1}}{1-q} \leq \frac{1}{1-q}$$

**Case 3.** Now suppose that  $f(n) \geq dn^{\log_b a + \epsilon}$ , and that for sufficiently large  $n$ :  $af(n/b) \leq cf(n)$ , for  $c < 1$ .

From this we get  $a^i f(n/b^i) \leq c^i f(n)$ , where we assume that  $n/b^{i-1} \geq n_0$  is still sufficiently large.

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq \sum_{i=0}^{\log_b n - 1} c^i f(n) + \mathcal{O}(n^{\log_b a}) \\ &\leq \frac{1}{1-c} f(n) + \mathcal{O}(n^{\log_b a}) \end{aligned}$$

$$q < 1 : \sum_{i=0}^n q^i = \frac{1-q^{n+1}}{1-q} \leq \frac{1}{1-q}$$

Hence,

$$T(n) \leq \mathcal{O}(f(n))$$

**Case 3.** Now suppose that  $f(n) \geq dn^{\log_b a + \epsilon}$ , and that for sufficiently large  $n$ :  $af(n/b) \leq cf(n)$ , for  $c < 1$ .

From this we get  $a^i f(n/b^i) \leq c^i f(n)$ , where we assume that  $n/b^{i-1} \geq n_0$  is still sufficiently large.

$$\begin{aligned} T(n) - n^{\log_b a} &= \sum_{i=0}^{\log_b n - 1} a^i f\left(\frac{n}{b^i}\right) \\ &\leq \sum_{i=0}^{\log_b n - 1} c^i f(n) + \mathcal{O}(n^{\log_b a}) \\ &\leq \frac{1}{1-c} f(n) + \mathcal{O}(n^{\log_b a}) \end{aligned}$$

$$q < 1 : \sum_{i=0}^n q^i = \frac{1-q^{n+1}}{1-q} \leq \frac{1}{1-q}$$

Hence,

$$T(n) \leq \mathcal{O}(f(n))$$

$$\Rightarrow T(n) = \Theta(f(n)).$$

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

$$\begin{array}{r} 1\ 1\ 0\ 1\ 1\ 0\ 1\ 0\ 1\ A \\ 1\ 0\ 0\ 0\ 1\ 0\ 0\ 1\ 1\ B \\ \hline \end{array}$$

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

1	1	0	1	1	0	1	0	1	$A$
1	0	0	0	1	0	0	1	1	$B$

---



## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

1	1	0	1	1	0	1	0	1	$A$
1	0	0	0	1	0	0	1	1	$B$
<hr/>									
								1	
								0	

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

$$\begin{array}{r} 1\ 1\ 0\ 1\ 1\ 0\ 1\ 0\ 1\ A \\ 1\ 0\ 0\ 0\ 1\ 0\ 0\ 1\ 1\ B \\ \hline \phantom{1\ 1\ 0\ 1\ 1\ 0\ 1\ 0\ 1\ } 1\ 0 \end{array}$$

The diagram illustrates the addition of two 10-bit integers, A and B. The bits of A are 1, 1, 0, 1, 1, 0, 1, 0, 1 and the bits of B are 1, 0, 0, 0, 1, 0, 0, 1, 1. A vertical box highlights the 8th bit position (from the right), where a carry of 1 is shown. The result of the addition in this position is 0.

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

1	1	0	1	1	0	1	0	1	$A$
1	0	0	0	1	0	0	1	1	$B$
<hr/>								0	0

The diagram illustrates the addition of two integers, A and B, using a carry propagation mechanism. The numbers are represented as binary strings: A = 110110101 and B = 100010011. The addition is performed bit-by-bit from right to left. A vertical box highlights the carry propagation from the 8th bit to the 9th bit. The result of the addition is 00.

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

$$\begin{array}{rcccccccc} 1 & 1 & 0 & 1 & 1 & 0 & 1 & 0 & 1 & A \\ 1 & 0 & 0 & 0 & 1 & 0 & 0 & 1 & 1 & B \\ \hline & & & & & & 1 & 1 & & \\ & & & & & & & & 0 & 0 \end{array}$$

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

1	1	0	1	1	0	1	0	1	$A$
1	0	0	0	1	0	0	1	1	$B$
<hr/>							0	0	0

The diagram illustrates the addition of two 9-bit integers, A and B. The bits of A are 1 1 0 1 1 0 1 0 1 and the bits of B are 1 0 0 0 1 0 0 1 1. A horizontal line is drawn under the bits of B. The result of the addition is shown below the line as 0 0 0. A vertical box highlights the 7th, 8th, and 9th bits of the result, which are 0, 0, and 0 respectively. Small '1' characters are placed below the 6th, 7th, and 8th bits of the result, indicating carry bits.

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

1	1	0	1	1	0	1	0	1	$A$
1	0	0	0	1	0	0	1	1	$B$
<hr/>									
					0	0	0		

The diagram illustrates the addition of two 9-bit integers, A and B. The bits of A are 1 1 0 1 1 0 1 0 1 and the bits of B are 1 0 0 0 1 0 0 1 1. A vertical line is drawn between the 5th and 6th bits. A light blue vertical box highlights the 6th bit of A (0) and the 6th bit of B (0). Below the 6th bit of B, there are three small '1' characters, indicating carry bits. Below the 6th bit of A, there is a '0' character, indicating the result of the addition of the 6th bits and the carry from the 5th bit.

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

1	1	0	1	1	0	1	0	1	$A$
1	0	0	0	1	0	0	1	1	$B$
					0	1	1	1	
					1	0	0	0	

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

1	1	0	1	1	0	1	0	1	$A$
1	0	0	0	1	0	0	1	1	$B$
				1					
				0	1	1	1	1	
					1	0	0	0	



## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

$$\begin{array}{rcccccccc} 1 & 1 & 0 & 1 & 1 & 0 & 1 & 0 & 1 & A \\ 1 & 0 & 0 & 0 & 1 & 0 & 0 & 1 & 1 & B \\ \hline & & & & 0 & 1 & 0 & 0 & 0 & \end{array}$$

The diagram illustrates the addition of two 9-bit integers, A and B, to produce a 9-bit result. The bits of A are 1 1 0 1 1 0 1 0 1 and the bits of B are 1 0 0 0 1 0 0 1 1. The result is 0 1 0 0 0. A vertical box highlights the 5th bit of A (1) and the 5th bit of B (1), which are added together to produce the 5th bit of the result (0). The carry bits are indicated by small subscripts: 1 under the 4th bit of B, 0 under the 5th bit of B, 1 under the 6th bit of B, 1 under the 7th bit of B, and 1 under the 8th bit of B.

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

1	1	0	1	1	0	1	0	1	$A$
1	0	0	0	1	0	0	1	1	$B$
<hr/>									
			1	0	1	1	1		
			0	1	0	0	0		

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

$$\begin{array}{rcccccccc} 1 & 1 & 0 & 1 & 1 & 0 & 1 & 0 & 1 & A \\ 1 & 0 & 0 & 0 & 1 & 0 & 0 & 1 & 1 & B \\ \hline & & & 0 & 0 & 1 & 0 & 0 & 0 & \end{array}$$

The diagram illustrates the addition of two 9-bit integers, A and B, to produce a 9-bit result. The bits of A are 1, 1, 0, 1, 1, 0, 1, 0, 1. The bits of B are 1, 0, 0, 0, 1, 0, 0, 1, 1. The result is 0, 0, 1, 0, 0, 0, 0. A vertical box highlights the 4th bit (index 3) of A, B, and the result, which is 1, 0, and 0 respectively. Small subscripts are present below the 4th bit of B (0) and the 4th bit of the result (0).

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

$$\begin{array}{rcccccccc} 1 & 1 & 0 & 1 & 1 & 0 & 1 & 0 & 1 & A \\ 1 & 0 & 0 & 0 & 1 & 0 & 0 & 1 & 1 & B \\ \hline & & 1 & 1 & 0 & 1 & 1 & 1 & & \\ & & & 0 & 0 & 1 & 0 & 0 & 0 & \end{array}$$

The diagram illustrates the addition of two 9-bit integers, A and B. The bits of A are 1, 1, 0, 1, 1, 0, 1, 0, 1 and the bits of B are 1, 0, 0, 0, 1, 0, 0, 1, 1. A vertical blue box highlights the third bit position (index 2 from the right), where a carry of 1 is shown below the bit. The resulting sum is 0, 0, 1, 0, 0, 0, 0, with a carry of 1 shown below the third bit position.

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

$$\begin{array}{rcccccccc} 1 & 1 & 0 & 1 & 1 & 0 & 1 & 0 & 1 & A \\ 1 & 0 & 0 & 0 & 1 & 0 & 0 & 1 & 1 & B \\ \hline & & 1 & 0 & 0 & 1 & 0 & 0 & 0 & \\ \end{array}$$

The diagram illustrates the addition of two 9-bit integers, A and B. The bits of A are 1, 1, 0, 1, 1, 0, 1, 0, 1. The bits of B are 1, 0, 0, 0, 1, 0, 0, 1, 1. A horizontal line is drawn under the bits of B. The result of the addition is shown below the line: 1, 0, 0, 1, 0, 0, 0. A vertical box highlights the second bit position (index 2) from the right, which contains a 0 from A, a 0 from B, and a 1 from the carry. Small subscripts are placed below the bits of B: 0 under the first bit, 1 under the second, 1 under the third, 0 under the fourth, 1 under the fifth, 1 under the sixth, and 1 under the seventh.



## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

	1	1	0	1	1	0	1	0	1	$A$
	1	0	0	0	1	0	0	1	1	$B$
	<hr/>									
	1	1	0	0	1	0	0	0		

The diagram illustrates the addition of two 9-bit integers, A and B. The bits of A are 1 1 0 1 1 0 1 0 1 and the bits of B are 1 0 0 0 1 0 0 1 1. The result of the addition is 1 1 0 0 1 0 0 0. A vertical box highlights the first two bits of the result, 1 1, which are the carry bits from the addition of the first two bits of A and B.

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

	1	1	0	1	1	0	1	0	1	$A$
	1	0	0	0	1	0	0	1	1	$B$
	0	0	1	1	0	1	1	1		
		1	1	0	0	1	0	0	0	



## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

	1	1	0	1	1	0	1	0	1	$A$
	1	0	0	0	1	0	0	1	1	$B$
	1	0	0	1	1	0	1	1	1	
	0	1	1	0	0	1	0	0	0	



## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

		1	1	0	1	1	0	1	0	1	$A$
		1	0	0	0	1	0	0	1	1	$B$
		<hr/>									
		1	0	1	1	0	0	1	0	0	0

## Example: Multiplying Two Integers

Suppose we want to multiply two  $n$ -bit Integers, but our registers can only perform operations on integers of constant size.

For this we first need to be able to add two integers  $A$  and  $B$ :

$$\begin{array}{r} 1\ 1\ 0\ 1\ 1\ 0\ 1\ 0\ 1\ A \\ 1\ 0\ 0\ 0\ 1\ 0\ 0\ 1\ 1\ B \\ \hline 1\ 0\ 1\ 1\ 0\ 0\ 1\ 0\ 0\ 0 \end{array}$$

This gives that two  $n$ -bit integers can be added in time  $\mathcal{O}(n)$ .

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 10001 \times 1011 \\ \hline \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 10001 \times 1011 \\ \hline \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline 1\ 0\ 0\ 0\ 1 \end{array}$$



## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0 \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline 1\ 0\ 0\ 0\ 1 \\ 1\ 0\ 0\ 0\ 1\ 0 \\ 0\ 0 \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0\ 0\ 0\ 0\ 0\ 0\ 0 \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0\ 0\ 0\ 0\ 0\ 0\ 0 \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0\ 0\ 0\ 0\ 0\ 0\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} \phantom{0\ 0\ 0\ 0\ 0} 0\ 0\ 0 \end{array}$$



## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0\ 0\ 0\ 0\ 0\ 0\ 0 \\ 1\ 0\ 0\ 0\ 1\ 0\ 0\ 0 \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0\ 0\ 0\ 0\ 0\ 0\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0\ 0\ 0 \\ \hline \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0\ 0\ 0\ 0\ 0\ 0\ 0 \\ 1\ 0\ 0\ 0\ 1\ 0\ 0\ 0 \\ \hline 1\ 0\ 1\ 1\ 1\ 0\ 1\ 1 \end{array}$$

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0\ 0\ 0\ 0\ 0\ 0\ 0 \\ 1\ 0\ 0\ 0\ 1\ 0\ 0\ 0 \\ \hline 1\ 0\ 1\ 1\ 1\ 0\ 1\ 1 \end{array}$$

Time requirement:

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0\ 0\ 0\ 0\ 0\ 0\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0\ 0\ 0 \\ \hline 1\ 0\ 1\ 1\ 1\ 0\ 1\ 1 \end{array}$$

**Time requirement:**

- ▶ Computing intermediate results:  $\mathcal{O}(nm)$ .

## Example: Multiplying Two Integers

Suppose that we want to multiply an  $n$ -bit integer  $A$  and an  $m$ -bit integer  $B$  ( $m \leq n$ ).

$$\begin{array}{r} 1\ 0\ 0\ 0\ 1 \times 1\ 0\ 1\ 1 \\ \hline \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 0\ 0\ 0\ 0\ 0\ 0\ 0 \\ \phantom{1\ 0\ 0\ 0\ 1} 1\ 0\ 0\ 0\ 1\ 0\ 0\ 0 \\ \hline 1\ 0\ 1\ 1\ 1\ 0\ 1\ 1 \end{array}$$

**Time requirement:**

- ▶ Computing intermediate results:  $\mathcal{O}(nm)$ .
- ▶ Adding  $m$  numbers of length  $\leq 2n$ :  $\mathcal{O}((m+n)m) = \mathcal{O}(nm)$ .

## Example: Multiplying Two Integers

**A recursive approach:**

Suppose that integers  $A$  and  $B$  are of length  $n = 2^k$ , for some  $k$ .

## Example: Multiplying Two Integers

**A recursive approach:**

Suppose that integers  $A$  and  $B$  are of length  $n = 2^k$ , for some  $k$ .





## Example: Multiplying Two Integers

**A recursive approach:**

Suppose that integers  $A$  and  $B$  are of length  $n = 2^k$ , for some  $k$ .

$$\boxed{b_{n-1} \quad \dots \quad b_0} \times \boxed{a_{n-1} \quad \dots \quad a_0}$$

# Example: Multiplying Two Integers

**A recursive approach:**

Suppose that integers  $A$  and  $B$  are of length  $n = 2^k$ , for some  $k$ .

$$\boxed{b_{n-1} \quad \cdots \quad b_{\frac{n}{2}} \quad b_{\frac{n}{2}-1} \quad \cdots \quad b_0} \times \boxed{a_{n-1} \quad \cdots \quad a_{\frac{n}{2}} \quad a_{\frac{n}{2}-1} \quad \cdots \quad a_0}$$

## Example: Multiplying Two Integers

**A recursive approach:**

Suppose that integers  $A$  and  $B$  are of length  $n = 2^k$ , for some  $k$ .



## Example: Multiplying Two Integers

**A recursive approach:**

Suppose that integers  $A$  and  $B$  are of length  $n = 2^k$ , for some  $k$ .



Then it holds that

$$A = A_1 \cdot 2^{\frac{n}{2}} + A_0 \text{ and } B = B_1 \cdot 2^{\frac{n}{2}} + B_0$$

## Example: Multiplying Two Integers

**A recursive approach:**

Suppose that integers  $A$  and  $B$  are of length  $n = 2^k$ , for some  $k$ .



Then it holds that

$$A = A_1 \cdot 2^{\frac{n}{2}} + A_0 \text{ and } B = B_1 \cdot 2^{\frac{n}{2}} + B_0$$

Hence,

$$A \cdot B = A_1 B_1 \cdot 2^n + (A_1 B_0 + A_0 B_1) \cdot 2^{\frac{n}{2}} + A_0 B_0$$

## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

```
1: if  $|A| = |B| = 1$  then  
2:   return  $a_0 \cdot b_0$   
3: split  $A$  into  $A_0$  and  $A_1$   
4: split  $B$  into  $B_0$  and  $B_1$   
5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$   
6:  $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$   
7:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$   
8: return  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$ 
```

## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

```
1: if  $|A| = |B| = 1$  then  
2:   return  $a_0 \cdot b_0$   
3: split  $A$  into  $A_0$  and  $A_1$   
4: split  $B$  into  $B_0$  and  $B_1$   
5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$   
6:  $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$   
7:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$   
8: return  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$ 
```

$\mathcal{O}(1)$

## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

1: **if**  $|A| = |B| = 1$  **then**

$\mathcal{O}(1)$

2:     **return**  $a_0 \cdot b_0$

$\mathcal{O}(1)$

3: **split**  $A$  into  $A_0$  and  $A_1$

4: **split**  $B$  into  $B_0$  and  $B_1$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

6:  $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$

7:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$



## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

1: **if**  $|A| = |B| = 1$  **then**

$\mathcal{O}(1)$

2:     **return**  $a_0 \cdot b_0$

$\mathcal{O}(1)$

3: **split**  $A$  into  $A_0$  and  $A_1$

$\mathcal{O}(n)$

4: **split**  $B$  into  $B_0$  and  $B_1$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

6:  $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$

7:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$

## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

1: **if**  $|A| = |B| = 1$  **then**

$\mathcal{O}(1)$

2:     **return**  $a_0 \cdot b_0$

$\mathcal{O}(1)$

3: **split**  $A$  into  $A_0$  and  $A_1$

$\mathcal{O}(n)$

4: **split**  $B$  into  $B_0$  and  $B_1$

$\mathcal{O}(n)$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

6:  $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$

7:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$

## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

1: **if**  $|A| = |B| = 1$  **then**

2:     **return**  $a_0 \cdot b_0$

3: **split**  $A$  into  $A_0$  and  $A_1$

4: **split**  $B$  into  $B_0$  and  $B_1$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

6:  $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$

7:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$

$\mathcal{O}(1)$

$\mathcal{O}(1)$

$\mathcal{O}(n)$

$\mathcal{O}(n)$

$T\left(\frac{n}{2}\right)$

## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

1: **if**  $|A| = |B| = 1$  **then**

$\mathcal{O}(1)$

2:     **return**  $a_0 \cdot b_0$

$\mathcal{O}(1)$

3: **split**  $A$  into  $A_0$  and  $A_1$

$\mathcal{O}(n)$

4: **split**  $B$  into  $B_0$  and  $B_1$

$\mathcal{O}(n)$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

$T(\frac{n}{2})$

6:  $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$

$2T(\frac{n}{2}) + \mathcal{O}(n)$

7:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$

## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

1: **if**  $|A| = |B| = 1$  **then**

$\mathcal{O}(1)$

2:     **return**  $a_0 \cdot b_0$

$\mathcal{O}(1)$

3: split  $A$  into  $A_0$  and  $A_1$

$\mathcal{O}(n)$

4: split  $B$  into  $B_0$  and  $B_1$

$\mathcal{O}(n)$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

$T(\frac{n}{2})$

6:  $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$

$2T(\frac{n}{2}) + \mathcal{O}(n)$

7:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

$T(\frac{n}{2})$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$

## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

1: <b>if</b> $ A  =  B  = 1$ <b>then</b>	$\mathcal{O}(1)$
2: <b>return</b> $a_0 \cdot b_0$	$\mathcal{O}(1)$
3: split $A$ into $A_0$ and $A_1$	$\mathcal{O}(n)$
4: split $B$ into $B_0$ and $B_1$	$\mathcal{O}(n)$
5: $Z_2 \leftarrow \text{mult}(A_1, B_1)$	$T(\frac{n}{2})$
6: $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$	$2T(\frac{n}{2}) + \mathcal{O}(n)$
7: $Z_0 \leftarrow \text{mult}(A_0, B_0)$	$T(\frac{n}{2})$
8: <b>return</b> $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$	$\mathcal{O}(n)$

## Example: Multiplying Two Integers

### Algorithm 3 $\text{mult}(A, B)$

1: <b>if</b> $ A  =  B  = 1$ <b>then</b>	$\mathcal{O}(1)$
2: <b>return</b> $a_0 \cdot b_0$	$\mathcal{O}(1)$
3: split $A$ into $A_0$ and $A_1$	$\mathcal{O}(n)$
4: split $B$ into $B_0$ and $B_1$	$\mathcal{O}(n)$
5: $Z_2 \leftarrow \text{mult}(A_1, B_1)$	$T\left(\frac{n}{2}\right)$
6: $Z_1 \leftarrow \text{mult}(A_1, B_0) + \text{mult}(A_0, B_1)$	$2T\left(\frac{n}{2}\right) + \mathcal{O}(n)$
7: $Z_0 \leftarrow \text{mult}(A_0, B_0)$	$T\left(\frac{n}{2}\right)$
8: <b>return</b> $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$	$\mathcal{O}(n)$

We get the following recurrence:

$$T(n) = 4T\left(\frac{n}{2}\right) + \mathcal{O}(n) .$$

# Example: Multiplying Two Integers

**Master Theorem:** Recurrence:  $T[n] = aT(\frac{n}{b}) + f(n)$ .

- ▶ Case 1:  $f(n) = \mathcal{O}(n^{\log_b a - \epsilon})$        $T(n) = \Theta(n^{\log_b a})$
- ▶ Case 2:  $f(n) = \Theta(n^{\log_b a} \log^k n)$        $T(n) = \Theta(n^{\log_b a} \log^{k+1} n)$
- ▶ Case 3:  $f(n) = \Omega(n^{\log_b a + \epsilon})$        $T(n) = \Theta(f(n))$



# Example: Multiplying Two Integers

**Master Theorem:** Recurrence:  $T[n] = aT(\frac{n}{b}) + f(n)$ .

- ▶ Case 1:  $f(n) = \mathcal{O}(n^{\log_b a - \epsilon})$        $T(n) = \Theta(n^{\log_b a})$
- ▶ Case 2:  $f(n) = \Theta(n^{\log_b a} \log^k n)$        $T(n) = \Theta(n^{\log_b a} \log^{k+1} n)$
- ▶ Case 3:  $f(n) = \Omega(n^{\log_b a + \epsilon})$        $T(n) = \Theta(f(n))$

In our case  $a = 4$ ,  $b = 2$ , and  $f(n) = \Theta(n)$ . Hence, we are in Case 1, since  $n = \mathcal{O}(n^{2-\epsilon}) = \mathcal{O}(n^{\log_b a - \epsilon})$ .

## Example: Multiplying Two Integers

**Master Theorem:** Recurrence:  $T[n] = aT(\frac{n}{b}) + f(n)$ .

- ▶ Case 1:  $f(n) = \mathcal{O}(n^{\log_b a - \epsilon})$        $T(n) = \Theta(n^{\log_b a})$
- ▶ Case 2:  $f(n) = \Theta(n^{\log_b a} \log^k n)$        $T(n) = \Theta(n^{\log_b a} \log^{k+1} n)$
- ▶ Case 3:  $f(n) = \Omega(n^{\log_b a + \epsilon})$        $T(n) = \Theta(f(n))$

In our case  $a = 4$ ,  $b = 2$ , and  $f(n) = \Theta(n)$ . Hence, we are in Case 1, since  $n = \mathcal{O}(n^{2-\epsilon}) = \mathcal{O}(n^{\log_b a - \epsilon})$ .

We get a running time of  $\mathcal{O}(n^2)$  for our algorithm.

## Example: Multiplying Two Integers

**Master Theorem:** Recurrence:  $T[n] = aT(\frac{n}{b}) + f(n)$ .

- ▶ Case 1:  $f(n) = \mathcal{O}(n^{\log_b a - \epsilon})$        $T(n) = \Theta(n^{\log_b a})$
- ▶ Case 2:  $f(n) = \Theta(n^{\log_b a} \log^k n)$        $T(n) = \Theta(n^{\log_b a} \log^{k+1} n)$
- ▶ Case 3:  $f(n) = \Omega(n^{\log_b a + \epsilon})$        $T(n) = \Theta(f(n))$

In our case  $a = 4$ ,  $b = 2$ , and  $f(n) = \Theta(n)$ . Hence, we are in Case 1, since  $n = \mathcal{O}(n^{2-\epsilon}) = \mathcal{O}(n^{\log_b a - \epsilon})$ .

We get a running time of  $\mathcal{O}(n^2)$  for our algorithm.

⇒ Not better than the “school method”.

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$Z_1 = A_1B_0 + A_0B_1$$

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned}Z_1 &= A_1B_0 + A_0B_1 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - A_1B_1 - A_0B_0\end{aligned}$$

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1} && - \underbrace{A_0B_0} \end{aligned}$$

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1} && - \underbrace{A_0B_0} \end{aligned}$$

Hence,



## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1}_{Z_2} - \underbrace{A_0B_0}_{Z_0} \end{aligned}$$

Hence,

### Algorithm 4 mult( $A, B$ )

```
1: if  $|A| = |B| = 1$  then
2:   return  $a_0 \cdot b_0$ 
3: split  $A$  into  $A_0$  and  $A_1$ 
4: split  $B$  into  $B_0$  and  $B_1$ 
5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$ 
6:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$ 
7:  $Z_1 \leftarrow \text{mult}(A_0 + A_1, B_0 + B_1) - Z_2 - Z_0$ 
8: return  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$ 
```

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1 B_0 + A_0 B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1 B_1} && - \underbrace{A_0 B_0} \end{aligned}$$

Hence,

### Algorithm 4 mult( $A, B$ )

```
1: if  $|A| = |B| = 1$  then
2:   return  $a_0 \cdot b_0$ 
3: split  $A$  into  $A_0$  and  $A_1$ 
4: split  $B$  into  $B_0$  and  $B_1$ 
5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$ 
6:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$ 
7:  $Z_1 \leftarrow \text{mult}(A_0 + A_1, B_0 + B_1) - Z_2 - Z_0$ 
8: return  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$ 
```

$\mathcal{O}(1)$

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1} && - \underbrace{A_0B_0} \end{aligned}$$

Hence,

### Algorithm 4 mult( $A, B$ )

1: **if**  $|A| = |B| = 1$  **then**

$\mathcal{O}(1)$

2:     **return**  $a_0 \cdot b_0$

$\mathcal{O}(1)$

3: split  $A$  into  $A_0$  and  $A_1$

4: split  $B$  into  $B_0$  and  $B_1$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

6:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

7:  $Z_1 \leftarrow \text{mult}(A_0 + A_1, B_0 + B_1) - Z_2 - Z_0$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1} && - \underbrace{A_0B_0} \end{aligned}$$

Hence,

### Algorithm 4 mult( $A, B$ )

1: **if**  $|A| = |B| = 1$  **then**

$\mathcal{O}(1)$

2:     **return**  $a_0 \cdot b_0$

$\mathcal{O}(1)$

3: split  $A$  into  $A_0$  and  $A_1$

$\mathcal{O}(n)$

4: split  $B$  into  $B_0$  and  $B_1$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

6:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

7:  $Z_1 \leftarrow \text{mult}(A_0 + A_1, B_0 + B_1) - Z_2 - Z_0$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1} && - \underbrace{A_0B_0} \end{aligned}$$

Hence,

### Algorithm 4 mult( $A, B$ )

1: <b>if</b> $ A  =  B  = 1$ <b>then</b>	$\mathcal{O}(1)$
2: <b>return</b> $a_0 \cdot b_0$	$\mathcal{O}(1)$
3: split $A$ into $A_0$ and $A_1$	$\mathcal{O}(n)$
4: split $B$ into $B_0$ and $B_1$	$\mathcal{O}(n)$
5: $Z_2 \leftarrow \text{mult}(A_1, B_1)$	
6: $Z_0 \leftarrow \text{mult}(A_0, B_0)$	
7: $Z_1 \leftarrow \text{mult}(A_0 + A_1, B_0 + B_1) - Z_2 - Z_0$	
8: <b>return</b> $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$	

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1} && - \underbrace{A_0B_0} \end{aligned}$$

Hence,

### Algorithm 4 mult( $A, B$ )

1: **if**  $|A| = |B| = 1$  **then**

2:     **return**  $a_0 \cdot b_0$

3: split  $A$  into  $A_0$  and  $A_1$

4: split  $B$  into  $B_0$  and  $B_1$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

6:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

7:  $Z_1 \leftarrow \text{mult}(A_0 + A_1, B_0 + B_1) - Z_2 - Z_0$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$

$\mathcal{O}(1)$

$\mathcal{O}(1)$

$\mathcal{O}(n)$

$\mathcal{O}(n)$

$T(\frac{n}{2})$

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1} && - \underbrace{A_0B_0} \end{aligned}$$

Hence,

### Algorithm 4 mult( $A, B$ )

1: **if**  $|A| = |B| = 1$  **then**

$\mathcal{O}(1)$

2:     **return**  $a_0 \cdot b_0$

$\mathcal{O}(1)$

3: split  $A$  into  $A_0$  and  $A_1$

$\mathcal{O}(n)$

4: split  $B$  into  $B_0$  and  $B_1$

$\mathcal{O}(n)$

5:  $Z_2 \leftarrow \text{mult}(A_1, B_1)$

$T(\frac{n}{2})$

6:  $Z_0 \leftarrow \text{mult}(A_0, B_0)$

$T(\frac{n}{2})$

7:  $Z_1 \leftarrow \text{mult}(A_0 + A_1, B_0 + B_1) - Z_2 - Z_0$

8: **return**  $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$

## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1} && - \underbrace{A_0B_0} \end{aligned}$$

Hence,

### Algorithm 4 mult( $A, B$ )

1: <b>if</b> $ A  =  B  = 1$ <b>then</b>	$\mathcal{O}(1)$
2: <b>return</b> $a_0 \cdot b_0$	$\mathcal{O}(1)$
3: split $A$ into $A_0$ and $A_1$	$\mathcal{O}(n)$
4: split $B$ into $B_0$ and $B_1$	$\mathcal{O}(n)$
5: $Z_2 \leftarrow \text{mult}(A_1, B_1)$	$T(\frac{n}{2})$
6: $Z_0 \leftarrow \text{mult}(A_0, B_0)$	$T(\frac{n}{2})$
7: $Z_1 \leftarrow \text{mult}(A_0 + A_1, B_0 + B_1) - Z_2 - Z_0$	$T(\frac{n}{2}) + \mathcal{O}(n)$
8: <b>return</b> $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$	



## Example: Multiplying Two Integers

We can use the following identity to compute  $Z_1$ :

$$\begin{aligned} Z_1 &= A_1B_0 + A_0B_1 && = Z_2 && = Z_0 \\ &= (A_0 + A_1) \cdot (B_0 + B_1) - \underbrace{A_1B_1} && - \underbrace{A_0B_0} \end{aligned}$$

Hence,

### Algorithm 4 mult( $A, B$ )

1: <b>if</b> $ A  =  B  = 1$ <b>then</b>	$\mathcal{O}(1)$
2: <b>return</b> $a_0 \cdot b_0$	$\mathcal{O}(1)$
3: split $A$ into $A_0$ and $A_1$	$\mathcal{O}(n)$
4: split $B$ into $B_0$ and $B_1$	$\mathcal{O}(n)$
5: $Z_2 \leftarrow \text{mult}(A_1, B_1)$	$T(\frac{n}{2})$
6: $Z_0 \leftarrow \text{mult}(A_0, B_0)$	$T(\frac{n}{2})$
7: $Z_1 \leftarrow \text{mult}(A_0 + A_1, B_0 + B_1) - Z_2 - Z_0$	$T(\frac{n}{2}) + \mathcal{O}(n)$
8: <b>return</b> $Z_2 \cdot 2^n + Z_1 \cdot 2^{\frac{n}{2}} + Z_0$	$\mathcal{O}(n)$

## Example: Multiplying Two Integers

We get the following recurrence:

$$T(n) = 3T\left(\frac{n}{2}\right) + \mathcal{O}(n) .$$

## Example: Multiplying Two Integers

We get the following recurrence:

$$T(n) = 3T\left(\frac{n}{2}\right) + \mathcal{O}(n) .$$

**Master Theorem:** Recurrence:  $T[n] = aT\left(\frac{n}{b}\right) + f(n)$ .

- ▶ Case 1:  $f(n) = \mathcal{O}(n^{\log_b a - \epsilon})$        $T(n) = \Theta(n^{\log_b a})$
- ▶ Case 2:  $f(n) = \Theta(n^{\log_b a} \log^k n)$        $T(n) = \Theta(n^{\log_b a} \log^{k+1} n)$
- ▶ Case 3:  $f(n) = \Omega(n^{\log_b a + \epsilon})$        $T(n) = \Theta(f(n))$

## Example: Multiplying Two Integers

We get the following recurrence:

$$T(n) = 3T\left(\frac{n}{2}\right) + \mathcal{O}(n) .$$

**Master Theorem:** Recurrence:  $T[n] = aT\left(\frac{n}{b}\right) + f(n)$ .

- ▶ Case 1:  $f(n) = \mathcal{O}(n^{\log_b a - \epsilon})$        $T(n) = \Theta(n^{\log_b a})$
- ▶ Case 2:  $f(n) = \Theta(n^{\log_b a} \log^k n)$        $T(n) = \Theta(n^{\log_b a} \log^{k+1} n)$
- ▶ Case 3:  $f(n) = \Omega(n^{\log_b a + \epsilon})$        $T(n) = \Theta(f(n))$

Again we are in Case 1. We get a running time of  $\Theta(n^{\log_2 3}) \approx \Theta(n^{1.59})$ .

## Example: Multiplying Two Integers

We get the following recurrence:

$$T(n) = 3T\left(\frac{n}{2}\right) + \mathcal{O}(n) .$$

**Master Theorem:** Recurrence:  $T[n] = aT\left(\frac{n}{b}\right) + f(n)$ .

- ▶ Case 1:  $f(n) = \mathcal{O}(n^{\log_b a - \epsilon})$        $T(n) = \Theta(n^{\log_b a})$
- ▶ Case 2:  $f(n) = \Theta(n^{\log_b a} \log^k n)$        $T(n) = \Theta(n^{\log_b a} \log^{k+1} n)$
- ▶ Case 3:  $f(n) = \Omega(n^{\log_b a + \epsilon})$        $T(n) = \Theta(f(n))$

Again we are in Case 1. We get a running time of  $\Theta(n^{\log_2 3}) \approx \Theta(n^{1.59})$ .

A huge improvement over the “school method”.